


# **QUIKFLEX<sup>®</sup> TS**

**BOTTLE PACKAGING SYSTEM**  
**CAN PACKAGING SYSTEM**




An innovative, high speed, highly flexible, fully enclosed packaging system offering double or single layers for maximum package flexibility

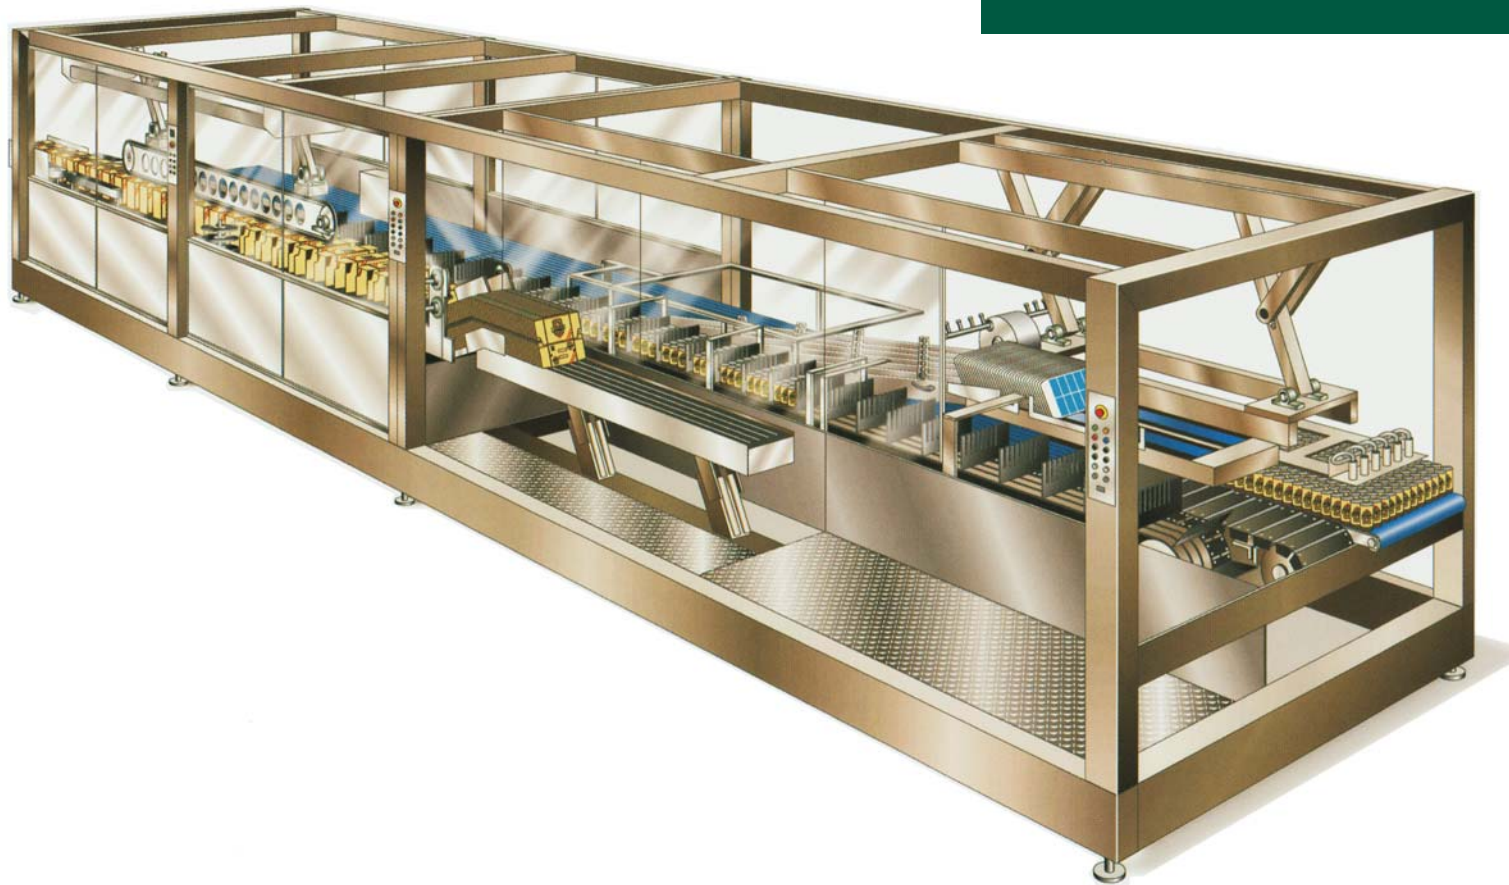

**GRAPHIC PACKAGING**  
INTERNATIONAL, INC.

# Quikflex<sup>®</sup> TS Specifications

## Machine Footprint

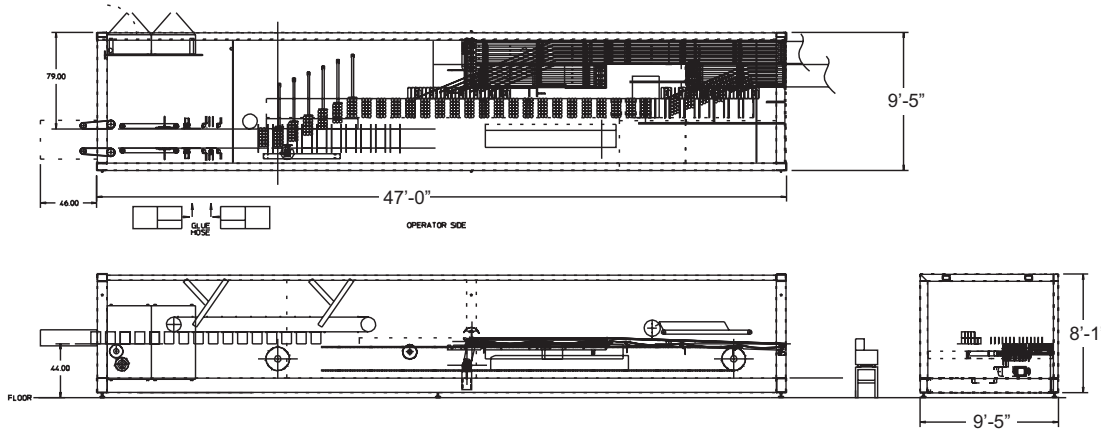

## Key Features

### Flexibility

Primary Container - Can, \*\*optional bottle capability on lower level only.

Diameter: Fixed, \*optional multi-diameter kit on lower level.

Pack Configurations: single and double layer:

- Single - 6, 8, 9, 10, 12, 15, 16, 18, 20, 24
- Double - 12, 18, 24, 30, 32, 36, 40, 48

### Efficient, Repeatable Changeovers

Accessory rail for exact, repeatable changes  
Tool-less changeovers for ease and speed  
Servo options available

### Ergonomic Design

Ergonomic design with 100% machine access.  
Low level, market proven segment wheel feeder.  
Sliding polycarbonate doors.  
Low-level, high capacity carton magazine.

### Easy to Operate

Functional push button operator interface  
Advanced touchscreen interface upgrades available  
Localizer fault indicator lights

### Machine Dimensions

47' long, 9' 5" wide, 8' 1" high  
(14.325m x 2.82m x 2.46m )

### Total Machine Weight

Approximately 40,000 lbs. (18,144kg)

### Speed Ranges

Operating speed up to 180 packs / minute  
and surge speed up to 200 packs / minute  
depending on pack size

### Electrical

400/460 VAC, 32 KW 3 phase, 50/60Hz or to customer specification

### Motor

Main Drive: 20 H.P.  
Infeed: 5 H.P.


### Hot Melt

Nordson or others on request


### Air Requirements

Standard 80PSIG, 11-13 SCFM  
(Venturi Pumps)  
Optional 80 PSIG, 3 CFM  
(Mechanical Pumps)  
6 bar - 5m<sub>3</sub>/hr


## Standard Package




Square Corners




Beveled Corner




Double Layer Econo Carton




Double Layer




Overlap Flap




Economy Flap



2-Sided Taper Pack



4-Sided Taper Pack



No Top Flap

## Optional Packages

### Lubrication

Centralized automatic oil & grease

- \* Multi diameter kit available as upgrade
- \*\* Bottle capability available as an upgrade



### Primary Container Size ranges

Minimum container height: 88mm (3.46")  
Maximum container height:  
single layer- 167mm (6.57")  
double layer - 150mm (5.91")  
Standard can diameter\*: 66mm (2.6")



**GRAPHIC PACKAGING**  
INTERNATIONAL, INC.

Graphic Packaging International, Inc.  
814 Livingston Court  
Marietta, Ga 30067  
Phone (770) 644-3000 Fax (770) 644-2970  
www.graphicpkg.com