


QUIKFLEX[®] 2100

BOTTLE PACKAGING SYSTEM
CAN PACKAGING SYSTEM




A high-speed, highly flexible, fully-enclosed packaging system for cans and bottles.

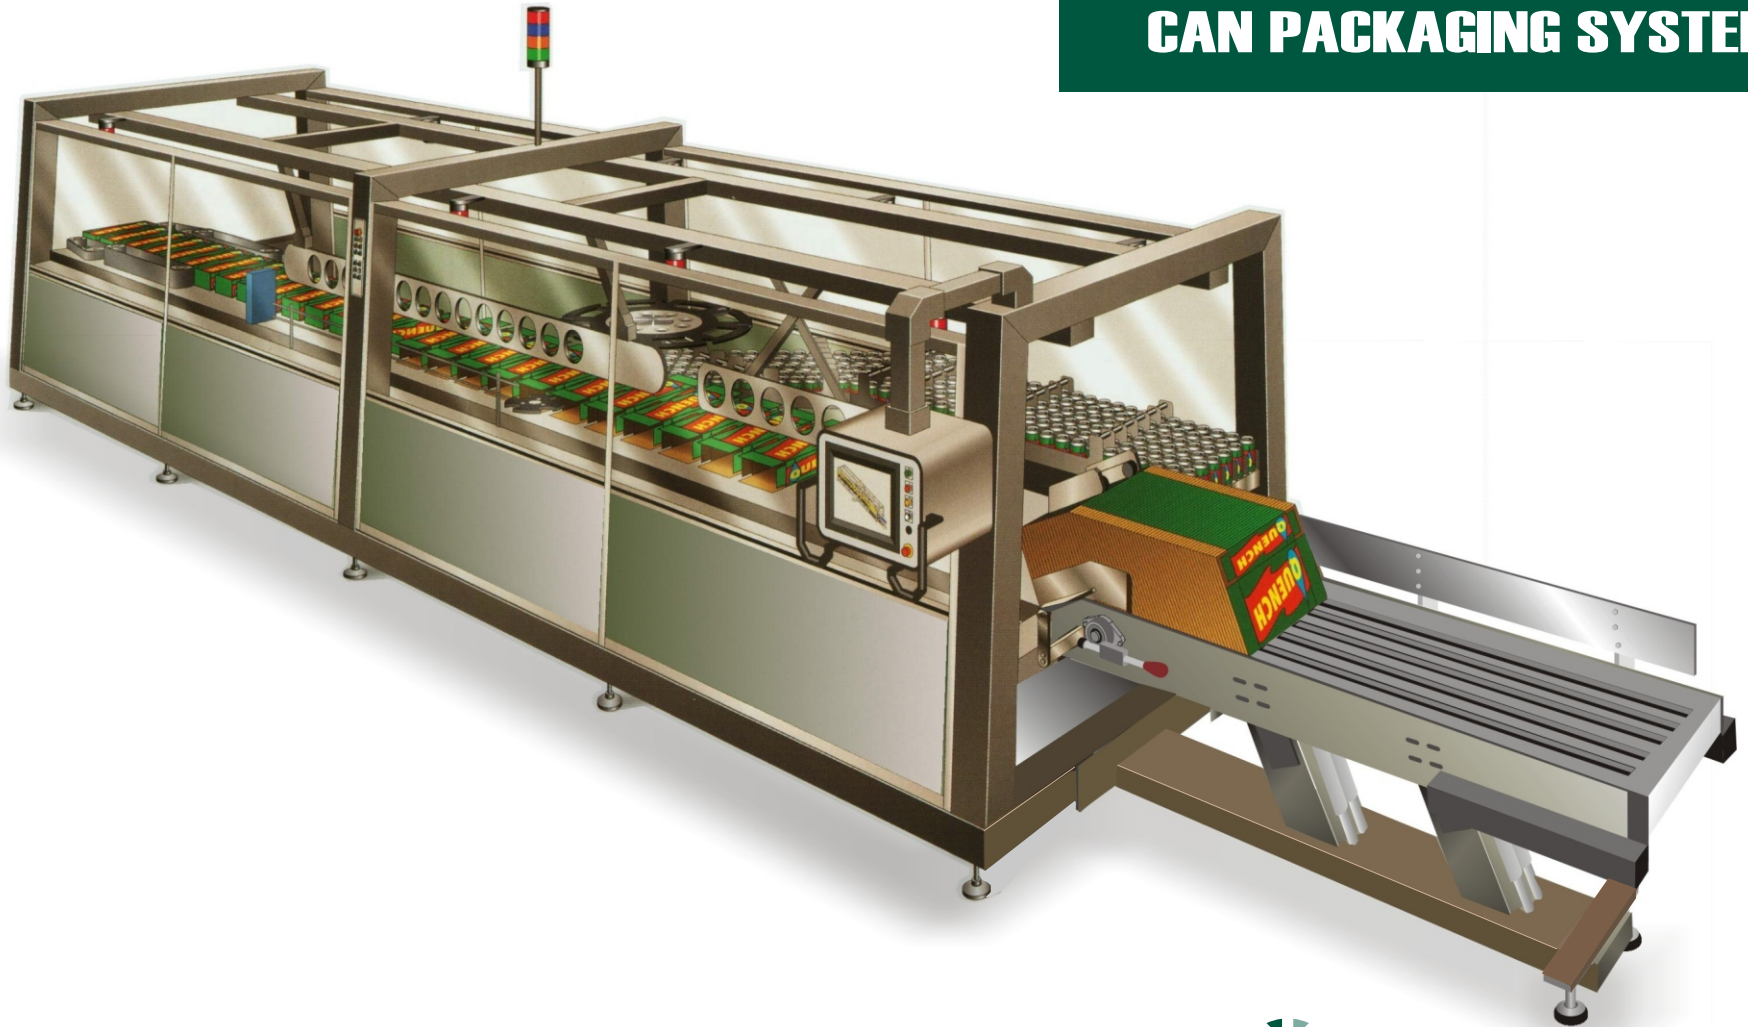


GRAPHIC PACKAGING
INTERNATIONAL, INC.

Quikflex 2100[®] Specifications

Machine Footprint

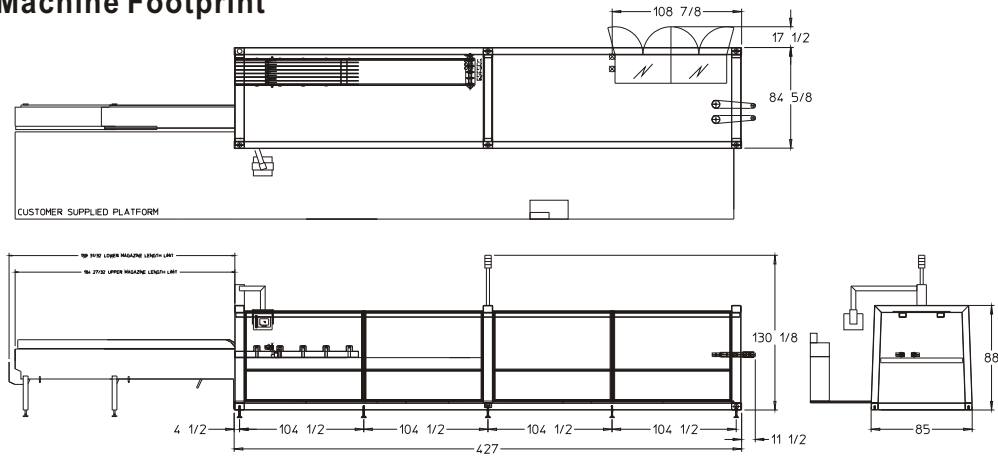

Package Styles

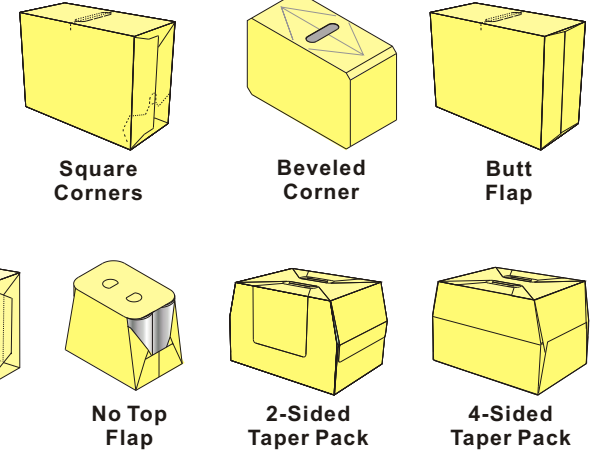

Key Features

Machine and Package Flexibility

The Quikflex 2100 packages cans, glass and PET in a wide range of configurations and package styles.

High Speed Packaging

The Quikflex 2100 is ideal for high speed filling lines.

Sustained Running speeds up to 250ppm for cans and 167ppm for glass and surge speeds up to 300ppm for cans and 200ppm for bottles.

No Tool Changeover

Our tool-less changeover technology is quick, simple and repeatable, eliminating time-consuming fine tuning.

Functional Design, Easy Access Construction

Convenient design permits easy component accessibility and provides effective operator protection. Single level, no elevated platforms required.

Machine Dimensions

35'-6" long, 7'-1" wide, 7'-7" high
(10.8m x 2.16m x 2.31m)

Machine Weight

Approximately 20,000 lbs. (9,090 kg)

Construction

Heavy duty tubular steel

Electrical

460 VAC, 3 phase, 60 Hz or to customer specifications

Air requirements

80 PSI, 6 bar, 11 CFM
(with venturi vacuum pumps)

Hot Melt

Nordson Model 3700 or other on request

Lubrication

Lincoln centralized automatic oil and grease

Package Configuration

Cans- Standard: 6, 8, 9, 10, 12, 15, 18, 20, 24
Optional: 4*, 30*

Bottles- Standard: 6, 8, 9, 10, 12, 15, 18, 20, 24
Optional: 4*

* dependent upon container diameter

Standard Features

- Multi-diameter
- Ergonomically designed segment wheel feeder
- Powered overhead
- Wedge metering
- Moving bed selector system
- 3.048m extended magazine
- Sliding doors
- Mechanical drive
- Accessory rail
- Walk-in frame
- Auto prime - Auto clean-out
- Split pitch

Optional Features

- Servo drive and changeover
- Gull wing doors
- Computer controlled interface
- Extended magazine to 4.268m
- High Speed 2x__ glass machine with sustained speeds up to 220ppm and surge speeds up to 250ppm

Product Ranges

Diameter: Typically 50mm to 76mm depending on format
Height: 86mm to 241mm
others available on request



Graphic Packaging International, Inc.
814 Livingston Court
Marietta, Ga 30067
Phone (770) 644-3000 Fax (770) 644-2970
www.graphicpkg.com