

# ***INTERMITTENT MOTION HANG TAG APPLICATORS***



- Kick-Off a Promotion*
- Launch a New Product*
- Enhance Your Brand Identity*
- Tell a Unique Story*
- Provide Product Information or Benefits*
- Offer a Coupon*
- Feature an Award*
- Provide Instructions or Recipes*



**Application of  
Neck/Hang Tags to  
Capture Consumer's Attention  
of Your Product**

# INTERMITTENT MOTION HANG TAG APPLICATORS

The Reciprocating Hang Tag Applicators are flexible, intermittent motion machines customized to apply neck or hang tags to bottles off-line or in your production line.

## Machine Features


### Functional Design, Easy Access Construction

- Functional Design, Easy Access Construction
- Heavy-duty cold rolled steel frame with Melonite coating.
- Three construction grades to match application needs, including water resistant/wash-down
- Clear visibility and easy-access guarding provide access to machine.

### Product & Size Ranges

- Product size dependent upon machine width and pick arm size.
- Hang tags: Paper, paperboard, plastic.
- Hang tag shapes: Round, rectangular, shaped.
- Single source of machine and hang tags.

### Sample tags

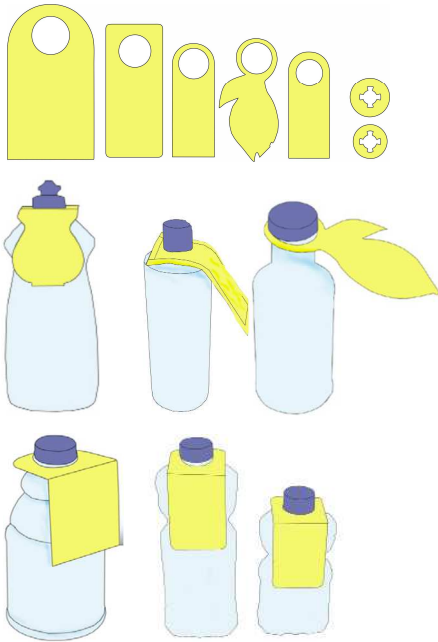

### Machine Features (Standard)

- Multiple sizes to suit application.
- Various drive options for greater flexibility.
- Casters for mobility and adjustable foot pads.
- PLC controlled - brand flexibility allows flexible configurations
- Drives, vacuum generators, and bearings that have been proven to be long lasting.

### Options

- Quick-change magazine and vacuum stem assemblies for quick, repeatable changeovers.
- Product positioning: Starwheels, line stops and/or integrated conveyors for product control.
- Line controls to meet customer needs.
- Signal options: Photo eye, batch counter, fixed cycle rate signal, timer to signal, encoder or customer to signal.
- Low magazine or missed item signal options.
- Light Tower Functionality: E-Stop, Run, High Discharge, or Low Infeed
- Swivel HMI station.
- Drive - Servo or Pneumatic
- Vacuum pump filters

### Specifications

#### Speed:

- Up to 60 cycles per minute per lane.
- Speed is dependent upon product characteristics

#### Product Configuration:

- Multiple magazine lanes to provide higher output.
- Magazine lanes perpendicular to flow or in-line with flow.

#### Machine Models:

- 12", 24", 36" and 48" wide standard models, custom widths available.

#### Electrical:

- Control Voltage: 24 VDC
- Supply Voltage: 120 VAC (220/460 VAC optional)

#### Air Requirements:

- 80 psi clean/dry air supply required (equivalent to class 3 or better).
- CFM dependent on vacuum system specified.

