

MARKSMAN™ 30

Semi-automated Wrap carton Locking System



MARKSMAN™ 30

Cans | Bottles | PET

For an operation needing to produce wraps at a higher rate than our manual machine option. The operator feeds product and cartons into the machine and the packs are completed automatically. Maximum production rates will be up to 25 packs a minute. Multiple diameter and height ranges for cans, glass and PET bottles can be accommodated.

Machine Features

Standard

- GPI standard lock

Frame

- Painted hot rolled steel with corrosion resistant components

Guards

- Enclosed guarding with jam gate sensors at product loading area

Optional

- Accessible lube points
- Automatic oil
- Casters for mobility
- Extension legs

Specifications

Standard Machine Elevation

41-3/8" +/- 2" (1050mm +/- 50mm)

Machine Weight

Approx. 1,500lbs (680 kg)

Air Requirements

80psi—1CFM
(6 bar—2m³/h)

Electrical

400/480 VAC
50/60 Hz

Main Drive Motors

Servo

Ancillary Equipment

Infeed and discharge conveyors required for maximum speed rating.

Changeover

Tool, hand knob and handwheel adjustments required.

Time

5-15 minutes, depending on package Variations.

Primary Container Size Ranges

Bottles, glass and plastic
Cans (2 piece and 3 piece)
Cups, pharmaceuticals, aerosols, etc.



Diameter: 1.69" (43mm) to 2.95" (75mm)
Height: 1.18" (30mm) to 11.02" (280 mm)

Pack Formats


Standard: 2x2, 2x3

Optional: 2x4, 2x5, 1x2, 1x3, 1x4, 1x5, 1x6

MM30

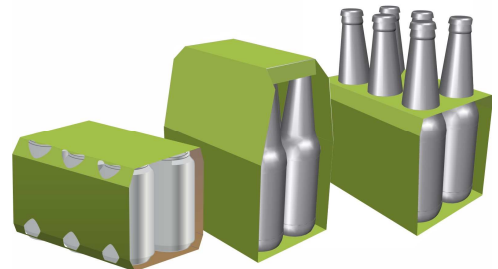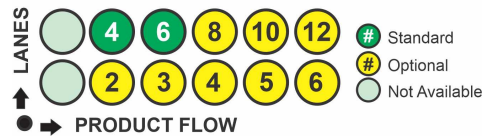

Machine Footprint

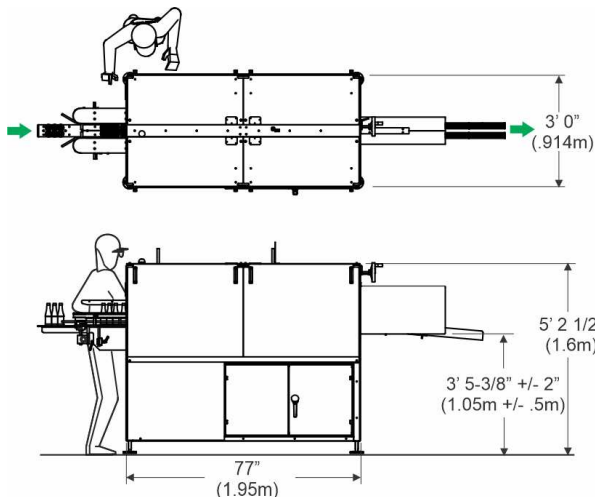

Pack Styles

Standard:

Straight Wrap, Over the Crown, Neck Through

Speed / Pitches

Operates at speeds up to 25ppm. The speed depends upon product type and operator's proficiency.