


# QUIKFLEX™ 300

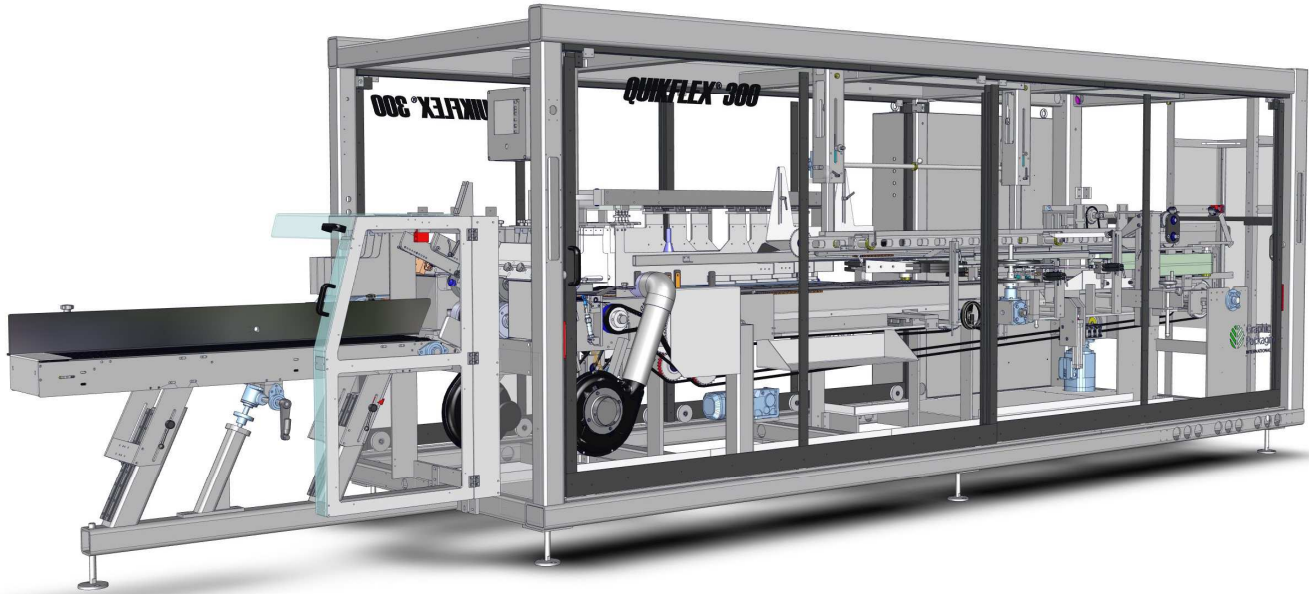

The QuikFlex™ 300 system for fully-enclosed packaging is an ideal cost-effective solution with a small footprint for moderate speed requirements, new product introductions, or trial market applications.

## Machinery Highlights

### No Tool Changeover


Our tool-less changeover technology is quick, simple and repeatable; eliminating time-consuming fine tuning. GPI's IQ Tablet with Changeover Checklist and Video Help enable proven changeover times of 15-30 minutes depending on the change required.

### Functional Design, Easy Access Construction

- Heavy-duty tubular steel frame with corrosion resistant coatings and materials.
- Full height, clear visibility and sliding guard doors provide easy walk-in access to the machine.

### More Production, Less Maintenance

Our design means less parts, fewer adjustments, simpler timing, fewer drive points, fewer chains, improved accessibility and better carton control from the feeder to the discharge.

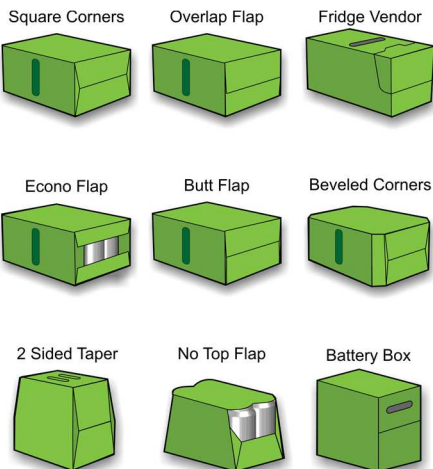

### Machine Features (Standard)

- Small footprint
- GPI IQ Tablet - technical & parts manuals, 3D part viewer & changeover checklist
- Runs multi-diameter/height products
- 4-packs to 12-packs in most containers
- No-tool, quick and repeatable changeovers
- Right or left hand carton loading and controls
- Walk-in frame
- Text fault display
- 1.6 meter carton magazine
- Ergonomic waist-high carton loading
- Market proven segment wheel feeder
- High volume air assist carton opening
- Wedge metering for smooth product infeed
- Powered overhead
- Carton Follower

### Machine Features (Optional)


- Change parts for additional product and or package formats
- Custom skirting
- Infeed mirror
- Internal lighting
- Tankless hot melt glue system
- Integrated turner divider (with or without reject)

### Value Added Products and Services:

**Tite-Pak:** Carton handling system for integrated glass-bottle separation and protection.

**Predictive Maintenance Program (PMP)** Let GPI manage your machine maintenance with our market-proven PMP program.

### Machine Footprint

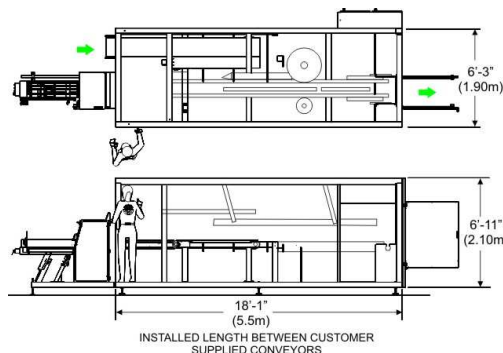


### Specifications

#### Speed

Bottles or Can operation at speeds up to:  
 Pitch Line Surge  
 10" 75ppm 90ppm  
 (ppm = packs per minute)

#### Package Configuration

4,6,8,9 & 12 packs  
 Range dependent on primary container diameters.



### Primary Container Size Ranges

Diameter: 2.1" (53mm) to 3" (76mm)  
 Height: 3.5" (89mm) to 11" (279 mm)

### Machine Dimensions

18' - 1" long, 6' - 3" wide, 6' - 11" high  
 (5.5m x 1.9m x 2.3m)

### Machine Weight

Approx. 12,000lbs (5,443 kg)

### Electrical

Machine: 460 VAC/60 Hz/30A  
 Gluer: 30A

### Air Requirements

65 PSI-18CFM  
 (4.5 Bar-30.6 m<sup>3</sup>/h)

### Lubrication

Automatic oiler  
 Manual grease

### Hot Melt

To customer specification