


QUIKFLEX™ 600 G3

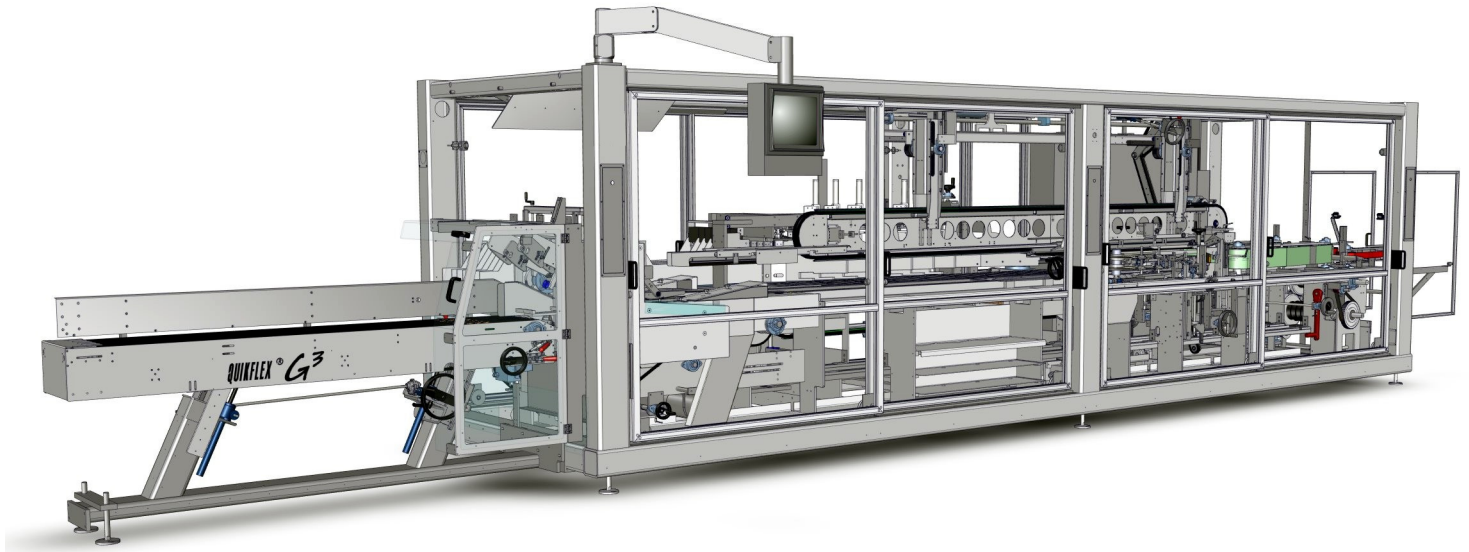

The QuikFlex® 600G3 for fully-enclosed packaging is an industry-proven packaging system for multi-diameter/multi-height Cans, Bottles and PET. This machine features our latest technology and innovation for moderate to high speed requirements on new or existing production lines.

Machinery Highlights

No Tool Changeover

Our tool-less changeover technology is quick, simple and repeatable; eliminating time-consuming fine tuning. GPI's IQ Tablet with Changeover Checklist and Video Help enable proven changeover times of 15-30 minutes depending on the change required.

Functional Design, Easy Access Construction

- Heavy-duty tubular steel frame with corrosion resistant coatings and materials.
- Full height, clear visibility and sliding guard doors provide easy walk-in access to the machine.

Primary Container Size Ranges

Diameter: 2.1" (53mm) to 3" (76mm)
Height: 3.5" (89mm) to 9.75" (247mm)

Machine Features (Standard)

- GPI IQ Tablet - technical & parts manuals, 3D part viewer & changeover checklist
- Runs multi-diameter/height products
- Narrow pack 2x2 53mm capability
- No-tool, quick and repeatable changeovers
- Right or left hand carton loading and controls
- Auto prime and clean-out features
- Walk-in frame
- Text fault display
- 2.5 meter carton magazine
- Ergonomic waist-high carton loading
- Market proven segment wheel feeder
- High volume air assist carton opening
- Wedge metering for smooth product infeed
- Powered overhead

Machine Features (Optional)

- Additional 3 meter extended carton magazine
- Change parts for additional product and or package formats
- Custom skirting
- Tankless hot melt glue system
- Coder mounting brackets
- Integrated turner divider (with or without reject)
- Auto decaser
- Touchscreen

Value Added Products and Services:

Tite-Pak: Carton handling system for integrated glass-bottle separation and protection.

Predictive Maintenance Program (PMP):

Let GPI manage your machine maintenance with our market-proven PMP program.

Specifications

High Speed
Bottle operation at speeds up to:

Pitch	Line	Surge
6.25"	200	220
12.5"	125	150

Can operation at speeds up to:

Pitch	Line	Surge
6.25"	200	220
12.5"	150	180

(ppm = packs per minute)

Package Configuration

4,6,8,9,10,12,15,16,18,20 & 24 packs

Range dependent on primary container diameters

Frame Dimensions

26' long, 7'-1" wide, 7'-4" high
(7.92m x 2.16m x 2.23m)

Machine Weight

Approx. 15,000 lbs (6,850 kg)

Electrical

Machine: 460 VAC, 60 Hz, 50A
Gluer: 50A

Air Requirements

65 PSI-19CFM
(4.5 Bar-32.3 m3/h)

Lubrication

Automatic oiler
Sealed bearings

Hot Melt

To customer specification

Machine Footprint

