


# QUIKFLEX™ CP

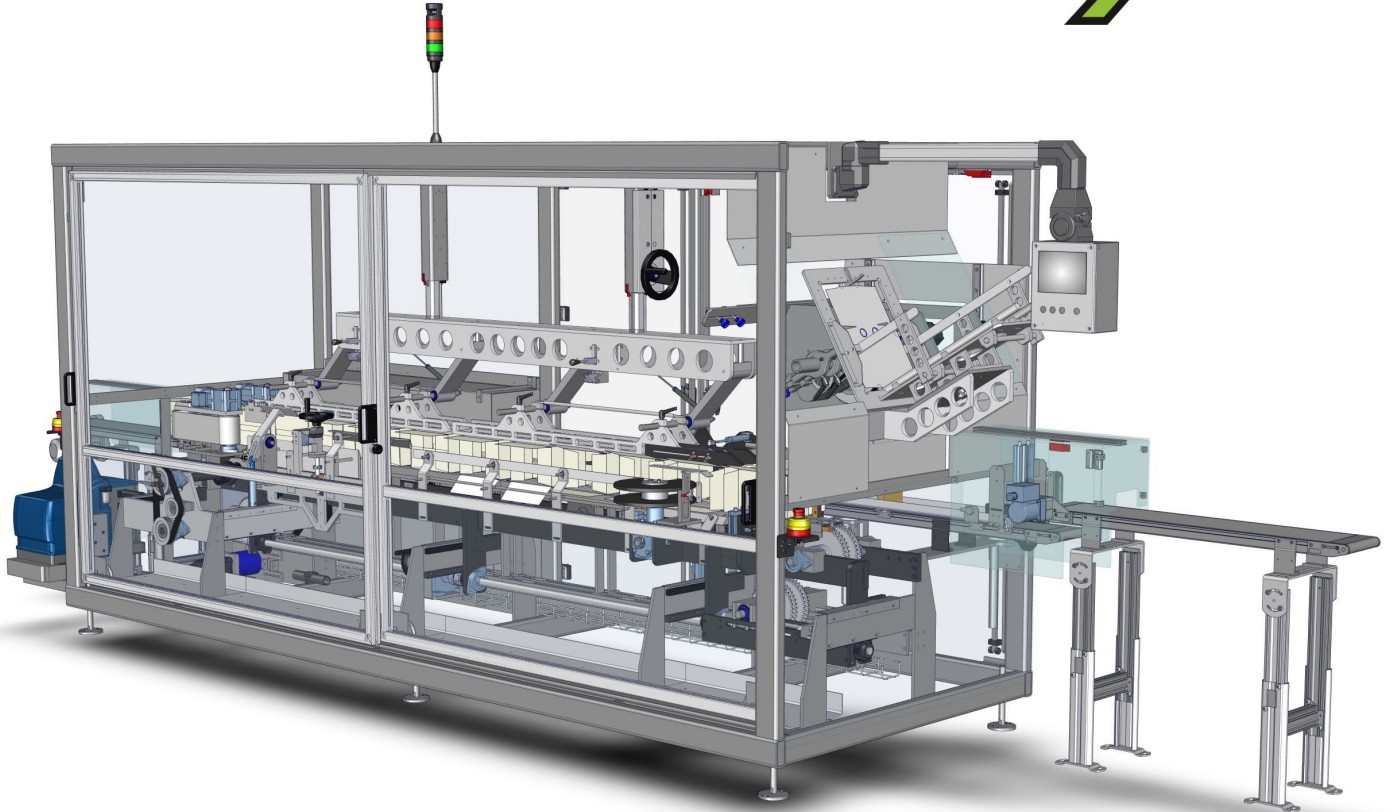

# QUIKFLEX™ CP


**GPI Cartoners are supplied in either continuous or intermittent motion to suit a variety of applications and line configurations. Our line of cartoners is flexible, enable quick changeovers and are designed to erect and seal cartons for totally enclosed packages.**

## Functional Design, Easy Access Construction

- Heavy-duty cold rolled welded steel frame made from square mechanical tubing with adjustable legs.
- Clear polycarbonate interlocking hinged guard doors or sliding doors for ease of access.

## Product and Size Ranges

- Designed to handle a full range of cartons.
- Carton size range: 1-1/2" to 11" wide x 4-1/4" to 13" long x 1-1/2" to 7" deep. Machine customized for other sizes.

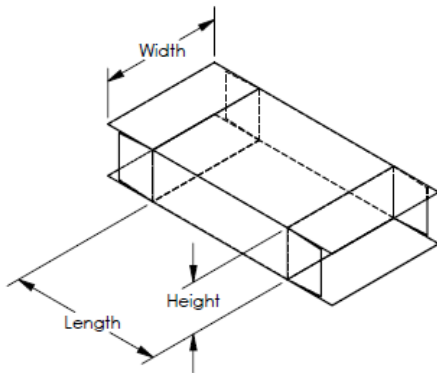

## Machine Features (Standard)

- Reciprocating, rotary or segment wheel feeding for reliable carton staging.
- Servo controlled for smooth operation.
- Carton Closing: Nordson Hot melt glue system or mechanical carton closure
- No tool changeover
- Allen Bradley electrical package.
- Color touchscreen HMI and light tower for visual display of machine functions.
- Scales and dial indicators for accurate changeovers.
- External Ethernet port for convenience.

## Machine Features (Optional)

- Three grades of construction are available from standard finish to a stainless steel wash-down construction.
- Ergonomic powered magazine for extended carton supply.
- Low carton sensing.
- Custom infeed per application.
- Barrel cam loader
- Mechanical vacuum pump.
- IQ tablet for technical manuals, parts manuals, 3D PDF Part Viewer, Dynamic Changeover Checklist with Video Guidance.
- Remote Connectivity.

## Specifications

### Speed

- Speeds range from 30 ppm for intermittent motion and up to 200 cartons per minute for continuous motion (depending upon product size and characteristics).

### Product Configuration

- Single or multi layer of product.

### Machine Models

- Intermittent motion or continuous motion

### Electrical

- Control Voltage: 24 VDC
- Supply Voltage: 480 VAC, Three Phase, 60 HZ

### Air Requirements

- 80 psi clean/dry air supply required (equivalent to class 3 or better).
- CFM dependent on vacuum system specified.

