


GRIPCLIP™ 1600

Innovative Can Clip System for Beverage Cans

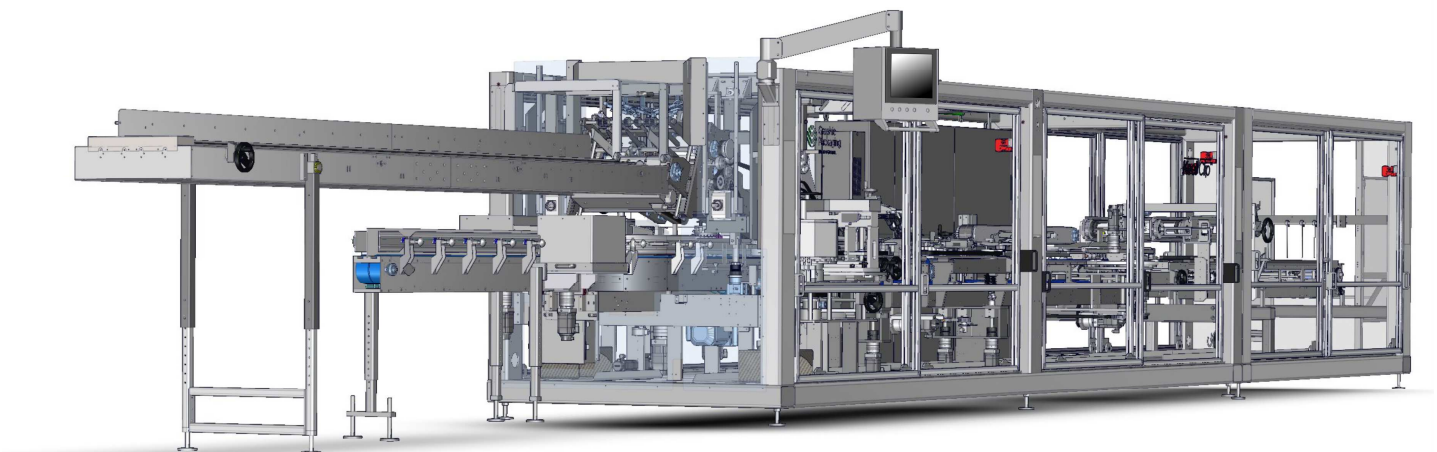

Finger hole carry feature

Can tops covered to keep them clean

Top billboard

Made from recyclable paperboard

Ability to remove individual cans leaving the rest of the pack intact

A sustainable paperboard packaging solution to replace plastic alternatives while offering the benefits of clean tops and billboard.

GRIPCLIP™ 1600

Cans

Based on the highly efficient product pitched Marksman™ 1600 product line, the new GripClip™ system offers a sustainable alternative to plastic can packs.

Machine Features

Standard

- Glue detection
- 10ft (3.2m) standard magazine
- Approx. 4500 carton capacity
- 10ft (3m) laned product infeed conveyor
- Segment wheel feeder
- IQ tablet with changeover checklist with videos and complete parts manual

Frame

- Heavy duty welded tubular painted steel frame with corrosion resistant components

Guards

- Full height, clear visibility, sliding guard doors providing easy walk-in access to the machine

Machine Options

- 15ft/4.5m extended magazine
- Approximately 9000 carton capacity
- Turner divider reject options based on the required packs, patterns and maximum speeds

Specifications

Standard Machine Elevation
43.5" +/-2" (1100mm +/- 50mm)

Machine Weight
Approx. 20,000lbs (9,000kg)

Air Requirements
80psi - 28CFM
(5.5 bar - 48 m3/h)

Glue
Hot melt glue

Vacuum
Venturi vacuum generator

Electrical
400/460 VAC
50/60 Hz

Main Drive Motors
Full servo drive machine

Changeover Method
No-tool repeatable changeovers.
Change parts required for diameter change

Changeover Time
(Single operator-estimated)
20 minutes format change
20 minutes can height change
90 minute diameter change

Primary Container Size Ranges


2-piece beverage cans only
Min diameter: 2.09" (53mm)
Max diameter: 2.6" (66mm)
Min height : 3.11" (79mm)
Max height: 7.44" (189mm)

Carton Styles

GripClip™ carton

Pack Formats


2x2—any can
2x3—any can
2x4—any can up to 12oz/330ml



Speed / Pitches

Operates at speeds up to:

Format	Line	Surge
2x2	350ppm	400ppm
2x3	330ppm	350ppm
2x4	240ppm	260ppm

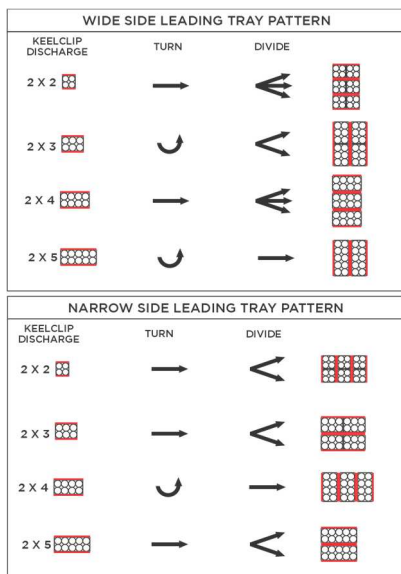

Machine Footprint

