


MARKSMAN™ 70

Low Speed Wrap Carton Packaging System

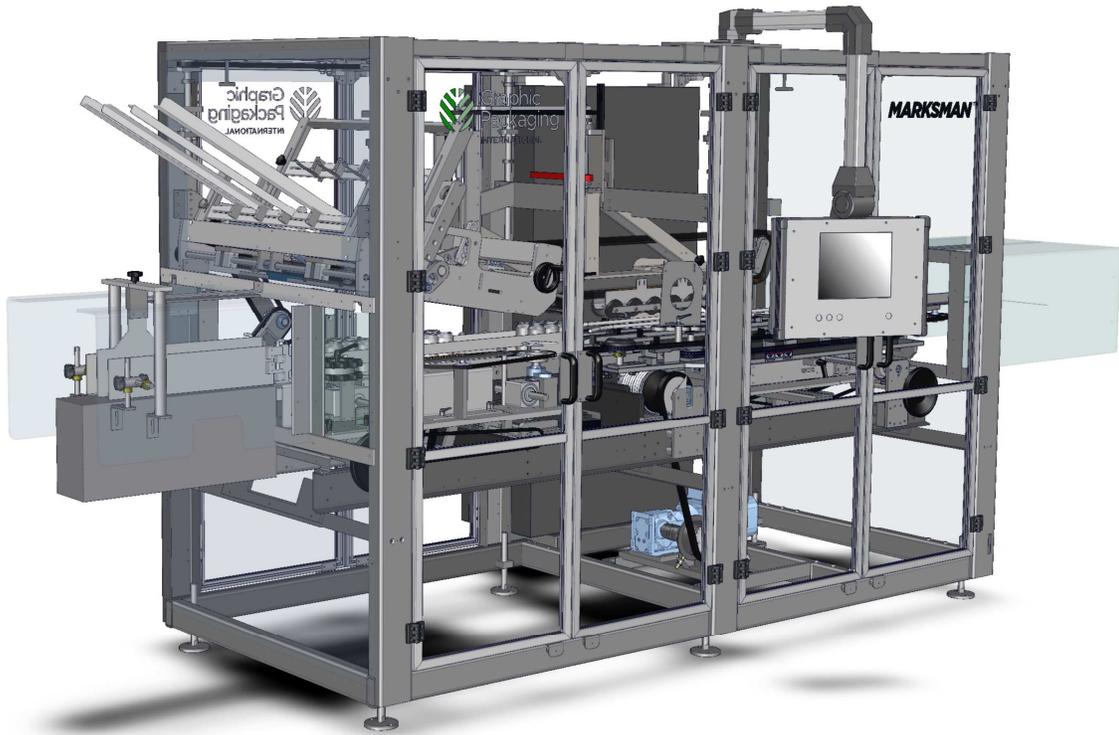

MARKSMAN™ 70

Cans | Bottles | PET

A low speed, fully automatic wrap packaging machine occupying minimal floor space. Capable of being adjusted to multiple diameter and height ranges for cans, glass and PET bottles.

Machine Features

Standard

- GPI standard lock
- Venturi vacuum generator
- Automatic oil system
- Starwheels and selector chains
- 19" (0.5m) 750 carton gravity magazine
- Reciprocating arm feeder

Frame

- Stainless steel frame with corrosion resistant components



Guards

- Full height, clear hinged guard doors providing access to the machine functions for changeover and maintenance

Optional

- Powered magazine with capacity of 2,800 cartons
- Accessible lube points
- Rotary vane vacuum pump
- Auto Grease

Machine Footprint

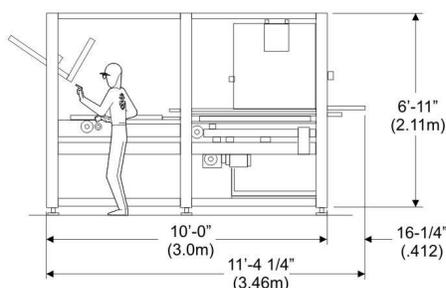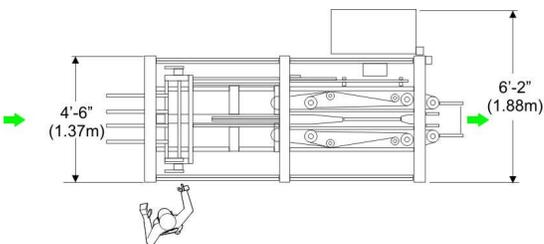

Specifications

Standard Machine Elevation
41-3/8" +/- 2" (1050mm +/- 50mm)

Machine Weight
Approx. 6,600lbs (3,000 kg)

Air Requirements
80psi - 4 CFM
(6 bar - 7m³/h)

Electrical
400/460 VAC
50/60 Hz

Main Drive Motors
AC Gearmotor

Ancillary Equipment
Turner / Divider

Changeover
Tool, hand knob and handwheel adjustments required.

Time
5 to 30 minutes, depending on the change required

Primary Container Size Ranges


Bottles, glass and plastic
Cans (2 piece and 3 piece)
Cups, pharmaceuticals, aerosols, etc.

Diameter: 1.69" (43mm) to 2.95" (75mm)
Height: 3.94" (100mm) to 11.02" (280 mm)

Pack Formats

Standard: 2x2, 2x3
Optional: 2x4, 2x5, 1x2, 1x3, 1x4, 1x5

MM70

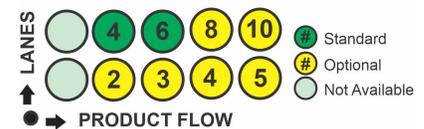

Pack Styles

Standard:
Over the crown, neck through, straight
Optional:
Ad-panel

Speed / Pitches

Forms Packages at speeds up to:



Pitch	Line	Surge
10"	50ppm	60ppm (standard)