# MARKSMAN TM 750 HS High-Speed Can Wrap Packaging System







# MARKSMAN<sup>™</sup>750 HS

Cans

The Marksman<sup>™</sup>750HS is a dedicated can machine, targeted for small multiple can packs of 2x2, 2x3 and 1x3 formats. The base design is capable of running multiple can heights and with appropriate change parts can run multiple can diameters. The package capability includes top and bottom gussets on dual lane packs. The machine benefits from a top speed of 300 packs per minute and a small footprint.

# **Machine Features**

#### **Standard**

- Graphic Packaging standard lock
- Dual venturi vacuum generators
- · Automatic oil system
- Automatic grease system
- 9 ft (3m) 5000 carton powered magazine
- Market proven segment wheel feeder with optimized geometry

#### **Frame**

Stainless steel frame with corrosion resistant components

#### Guards

 Full height, clear hinged guard doors providing access to the machine functions for changeover and maintenance

# **Optional**

 Powered magazine with capacity for 10,000 cartons Lock inspection w/wo pack reject

# **Specifications**

# **Standard Machine Elevation**

41 3/8" +/-2" (1050mm +/-50mm)

#### **Machine Weight**

Approx. 10,500lbs (4,800 kg)

## **Air Requirements**

80psi - 8 CFM (6 bar -  $14 \text{ m}^3/\text{h}$ )

#### **Electrical**

400/460 VAC 50/60 Hz

#### **Main Drive Motors**

**AC** Gearmotor

## **Ancillary Equipment**

Turner / Divider / Reject units

# Changeover


No-tool changeovers are quick, simple and repeatable

#### Time

30 minutes (format change) 45 minutes (product / change)

> 1'- 8" (.51m)

# **Machine Footprint**

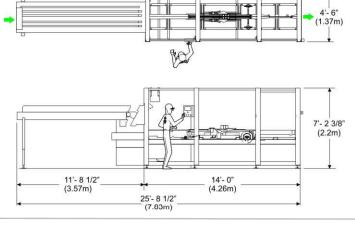

# **Primary Container Size Ranges**


2-piece beverage cans only

Diameter: 2.09" (53mm) to 2.6" (66mm) Height: 3.46" (88mm) to 7.44" (189mm)

#### **Pack Formats**

Standard: 1x2, 1x3, 2x2, 2x3 Optional: 1x4, 1x5,, 1x6, 2x4, 2x5, 2x6

# MM750HS 12 1/2"



#### Pack Styles

Top and bottom gussets for dual lane packs

 Straight wraps with wrap heel and crown apertures for single lane packs

# **Speed / Pitches**

Operates at speeds up to:		
Pitch	Line	Surge
10"	250ppm	300ppm
12.5"	200ppm	240ppm

